



MOONRAKER

HALO

LED Floodlight Range



*All products must be registered at haloinnovation.co.uk to qualify for warranty

MOONRAKER

FEATURES

- / Die-casting aluminium and tempered glass
- / Slimline design
- / IP65
- / 6000K Cool White colouring
- / 700mm extended leads for easier installation
- / Replacement for tungsten halogen bulbs
- / 5 year warranty*
- / LSF Wiring



OPTIONS

- / PIR versions available


APPLICATIONS

- / Factories / Warehouses
- / Supermarkets
- / Exhibition halls
- / Exterior lighting



DIMENSIONS

Model	A (mm)	B (mm)	C (mm)	D (mm)
10W	115	80	102	25
20W	150	104	133	29
30W	180	125	157	32
50W	233	160	205	40
100W	318	227	280	53
150W	380	266	324	55
200W	460	321	387	55

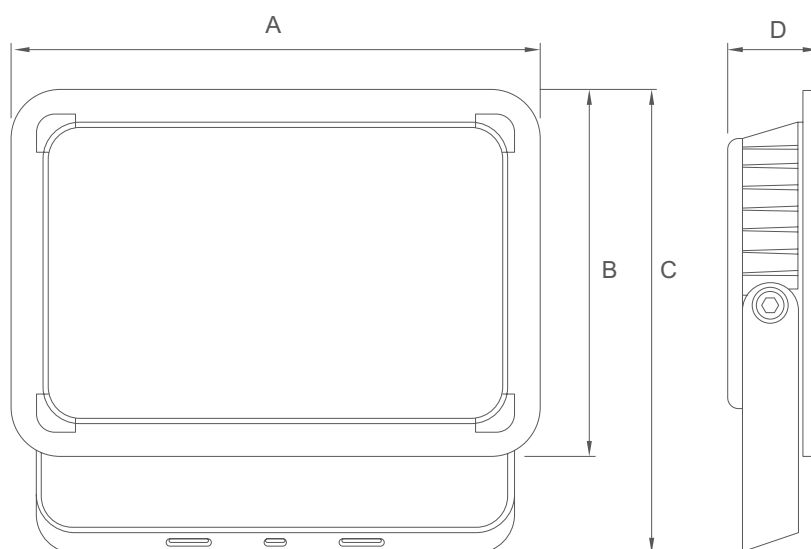

*All products must be registered at haloinnovation.co.uk to qualify for warranty

DATA SHEET

Part No	Description	Power Consumption (W)	Lumen Efficacy (Lm/w)	Luminous Flux (LM)
MOONRAKER				
MOON10W	Moonraker 10W Flood light	10	90	900
MOON20W	Moonraker 20W Flood light	20	90	1800
MOON30W	Moonraker 30W Flood light	30	90	2700
MOON50W	Moonraker 50W Flood light	50	90	4500
MOON100W	Moonraker 100W Flood light	100	90	9000
MOON150W	Moonraker 150W Flood light	150	90	13500
MOON200W	Moonraker 200W Flood light	200	90	18000
MOONRAKER + PIR				
MOON10WPIR	Moonraker 10W Flood light + PIR	10	90	900
MOON20WPIR	Moonraker 20W Flood light + PIR	20	90	1800
MOON30WPIR	Moonraker 30W Flood light + PIR	30	90	2700
MOON50WPIR	Moonraker 50W Flood light + PIR	50	90	4500

TECHNICAL SPECIFICATIONS

Housing Colour	Black	Lead Length	700mm
Power Rating	AC 200-240V 50Hz	Beam Angle	120°
Colour Temp.	6000K	Lifespan	35,000 hours
Protection Class	IP65	CRI	80
Switching Cycle before Failure	>100,000 times	Lifespan	50,000 hours
Temperature	-20° to 45°C	Energy Efficiency Class	A+ / A++
		Warranty	5 years

PHOTOMETRY CURVE

